



WinSite

[Search WinSite](#) || [Browse WinSite](#) || [HotFiles@WinS](#)

WinSite Featured Software

Smart Imaging Spreadsheet ActiveScreenLock Free Text to Speech Reader Arcade

Makes image processing
and editing easy

Secure your
computer while
you're away!

Computer reads news,
emails aloud using high
quality natural voice.

Highly
addictiv
puzzle g
for all a

InfoCard@WinSite

Program Name	HTMLed	Download Now
Description	Shareware HTML editor with tables, forms	
Version/File	2.0c	html32.exe
Date	26 Apr 97	
License/Cost	ShareWare	
Runs on	Win 95/98/ME	
File Size	1.35MB	
Requirements		
Language		
Downloads	124	
Submitted By	Peter Crawshaw sales@ist.ca	
Company	Internet Software Technologies	
User Rating	Waiting for first 5 votes.	Vote Here
User Comments	No Reviews	Submit Review

Visual
constructor
for image
processing


SIMAGIS™




HTMLed

09/162,685

(1).

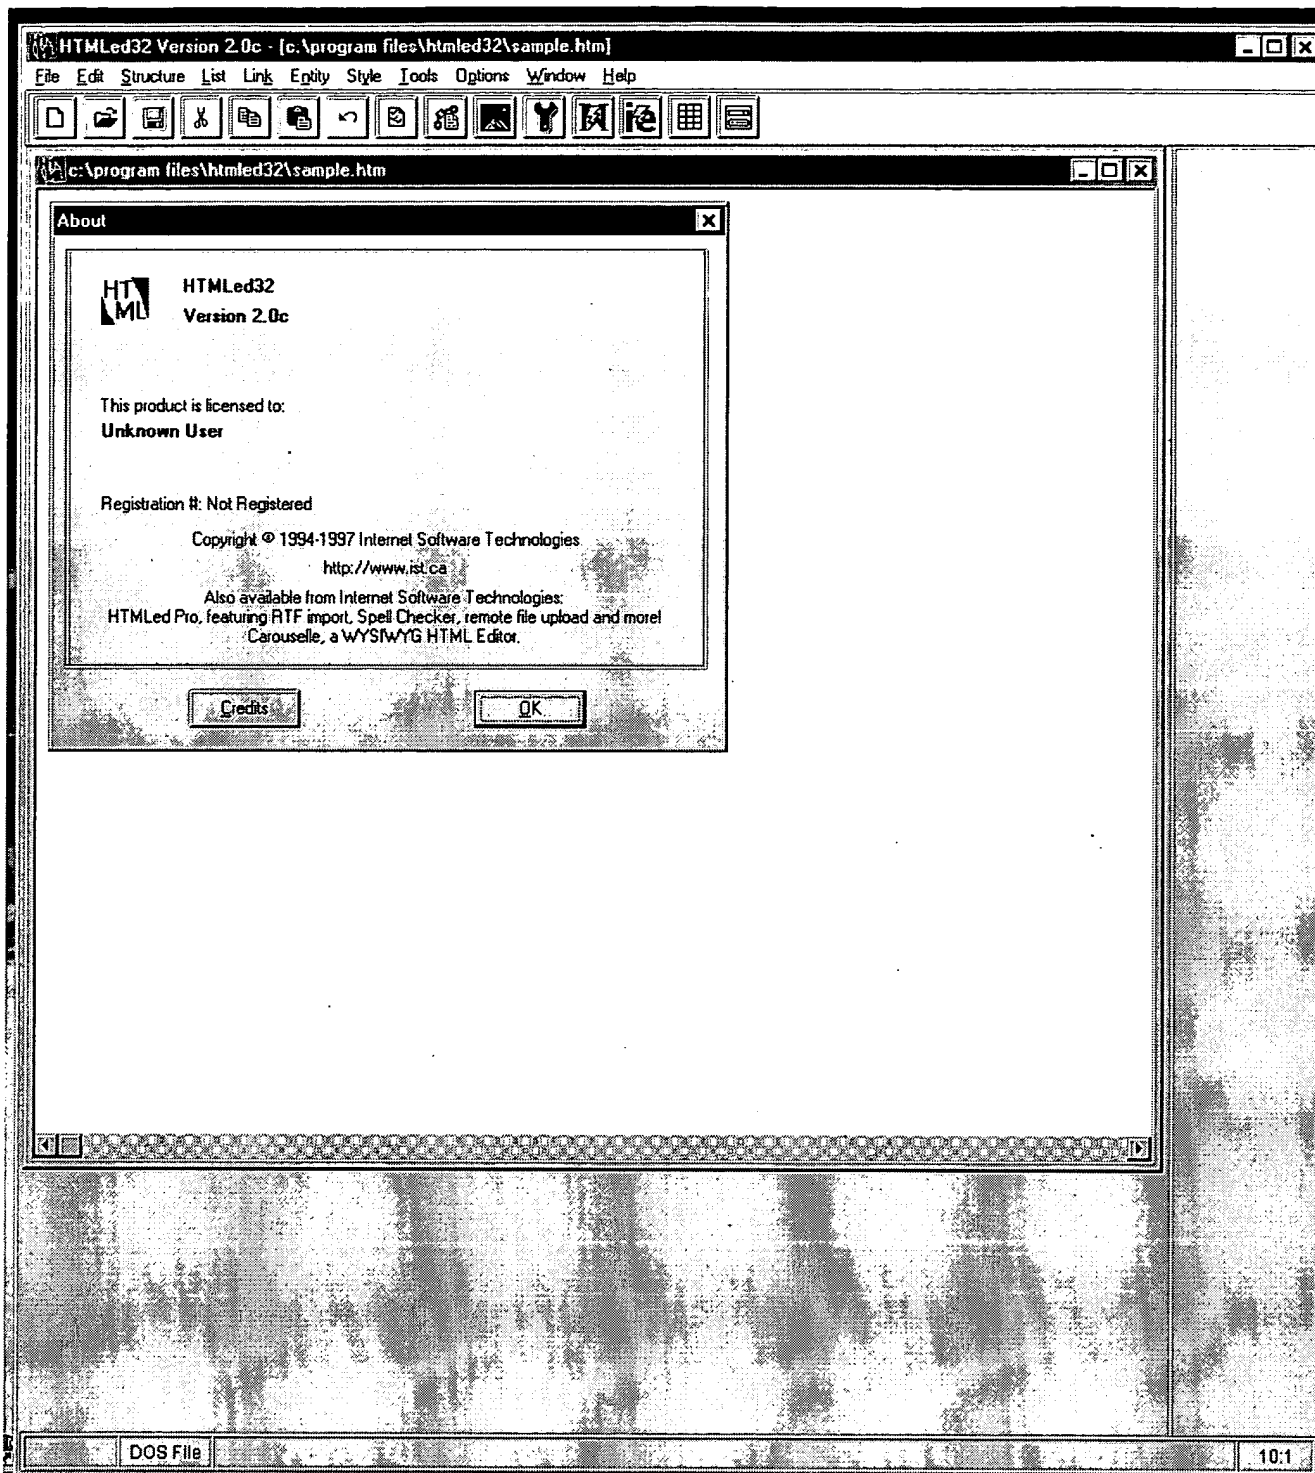

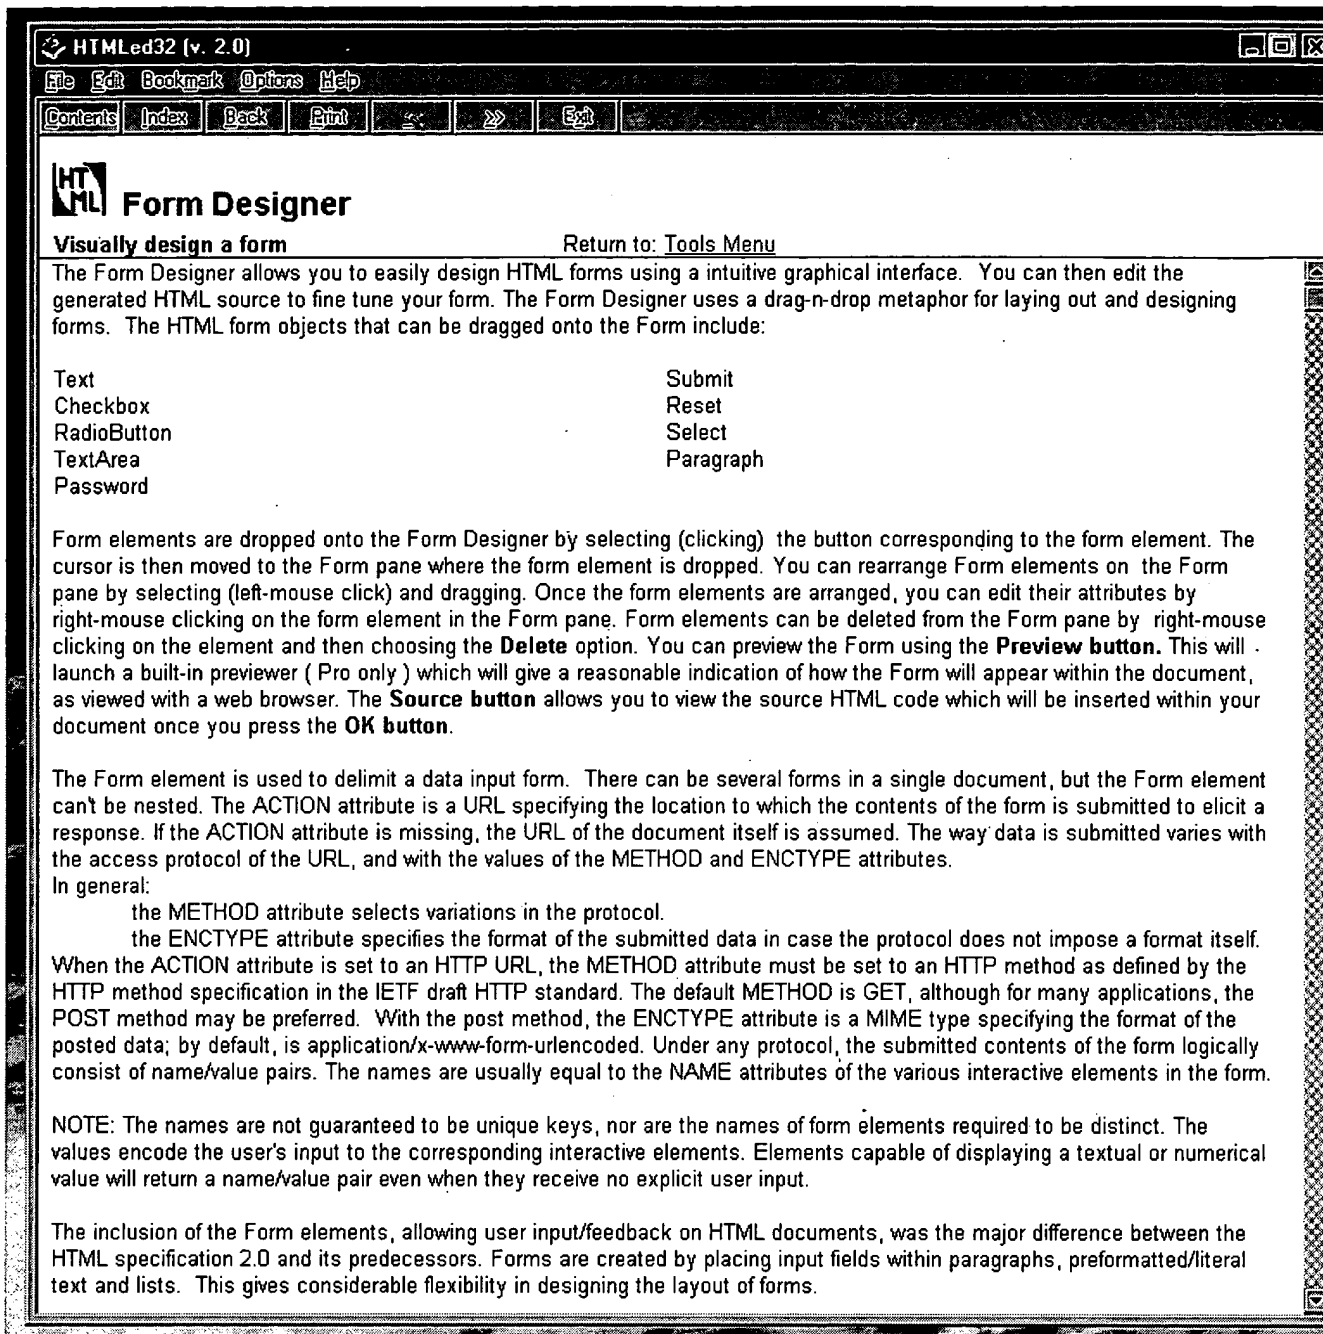



Form Designer

Visually design a form

[Return to: Tools Menu](#)

Form Elements :

<FORM> ... </FORM>	A form within a document
<INPUT ...> ... </INPUT>	One input field
<OPTION>	One option within a Select element.
<SELECT> ... </SELECT>	A selection from a finite set of options
<TEXTAREA ...>...</TEXTAREA>	A multi-line input field

Each variable field is defined by an INPUT, TEXTAREA, or OPTION element and must have a NAME attribute to identify its value in the data returned when the form is submitted.

Example of use (a questionnaire form):

```
<H3>Sample Questionnaire</H3>
<P>Please fill out this questionnaire:
<FORM METHOD="POST" ACTION="http://www.ist.ca/sample">
<P>Your name: <INPUT NAME="name" size="48">
<P>Male <INPUT NAME="gender" TYPE=RADIO VALUE="male">
<P>Female <INPUT NAME="gender" TYPE=RADIO VALUE="female">
<P>Number in family: <INPUT NAME="family" TYPE=text>
<P>Cities in which you maintain a residence:
<UL>
<LI>Montreal<INPUT NAME="city" TYPE=checkbox VALUE="montreal">
<LI>New York<INPUT NAME="city" TYPE=checkbox VALUE="newyork">

<LI>Other <TEXTAREA NAME="other" cols=48 rows=4></textarea>
</UL>
Nickname: <INPUT NAME="nickname" SIZE="42">
<P>Thank you for responding to this questionnaire.
<P><INPUT TYPE=SUBMIT> <INPUT TYPE=RESET>
</FORM>
```

In the example above, the <P> and elements have been used to lay out the text and input fields. The HTML browser is responsible for handling which field will currently get keyboard input.

Many platforms have existing conventions for forms, for example, using Tab and Shift keys to move the keyboard focus forwards and backwards between fields, and using the Enter key to submit the form. In the example, the SUBMIT and RESET buttons are specified explicitly with special purpose fields. The SUBMIT button is used to e-mail the form or send its contents to the server as specified by the ACTION attribute, while RESET resets the fields to their initial values. When the form consists of a single text field, it may be appropriate to leave such buttons out and rely on the Enter key.

The Input element is used for a large variety of types of input fields. To let users enter more than one line of text, use the Textarea element.

HTTP File Upload: It is possible to write forms that ask for files as input, rather than input boxes and other simple elements such as checkboxes and radio buttons.

An example of such a form would be:

```
<FORM ENCTYPE="multipart/form-data" ACTION="_URL_" METHOD=POST>
Send this file: <INPUT NAME="userfile" TYPE="file">
<INPUT TYPE="submit" VALUE="Send File">
</FORM>
```

NOTE : This method of file upload is not yet standard. The Internet Draft, "Form based file upload in HTML", suggested adding a FILE option to the TYPE attribute of the INPUT element, allowing an ACCEPT attribute for the INPUT element (which is a list of media types or type patterns allowed for the input) and allowing the ENCTYPE of a form to be multipart/form-data.

